

TRAVERSA DI IRRIGIDIMENTO *Stiffening crosspiece*




75

S

V

I

Z

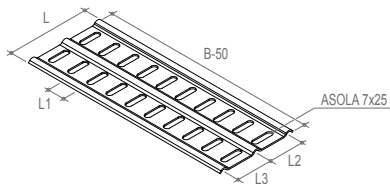

S	V	I	Codice/ Code	S mm	Δ kg/pz
A3	□	75XXX100H		1,2	0,04
A3	□	75XXX150H		1,2	0,08
A3	□	75XXX200H		1,2	0,12
A3	□	75XXX300H		1,2	0,20
A3	□	75XXX400K		1,5	0,36
A3	□	75XXX500K		1,5	0,46
A3	□	75XXX600K		1,5	0,56

□ Scegli il materiale/ Choose the material

B mm	H mm	L mm	L1 mm	L2 mm	L3 mm
100	5	84	25	25	40
150	5	84	25	25	40
200	5	84	25	25	40
300	5	84	25	25	40
400	5	84	25	25	40
500	5	84	25	25	40
600	5	84	25	25	40

Δ kg/pz	S mm	Z	Codice/ Code
0,04	1,2	A3 Z	75XXX100H
0,09	1,2	A3 Z	75XXX150H
0,13	1,2	A3 Z	75XXX200H
0,22	1,2	A3 Z	75XXX300H
0,38	1,5	A3 Z	75XXX400K
0,49	1,5	A3 Z	75XXX500K
0,60	1,5	A3 Z	75XXX600K